



Alert



Urban space



Suburban



Private sites

TACTILE SURFACE > VIGILANCE AWARENESS STRIP

AXILINE

RESISTANCE TO TRAFFIC



Vigilance awareness strip that makes the movement of visually impaired people safe by alerting them to the presence of nearby road crossings, stairs and platform edges. >>


ADVANTAGES

> USE

- Good foot and cane **detectability**
- Excellent **grip with all types of substrates** through its methacrylic resin or bitumen bonding
- Contrast guaranteed: several colours available and possibility of taking advantage of the sole/block contrast with two-tone versions
- Compliant with NFP 98-351 Pathways - Integration of people with disabilities - Vigilance awareness

> OPERATION

- **Multi-purpose** awareness strip that can be used in standard width and in reduced width meeting all equipment needs with a single reference
- Suitable for a wide variety of road surfaces

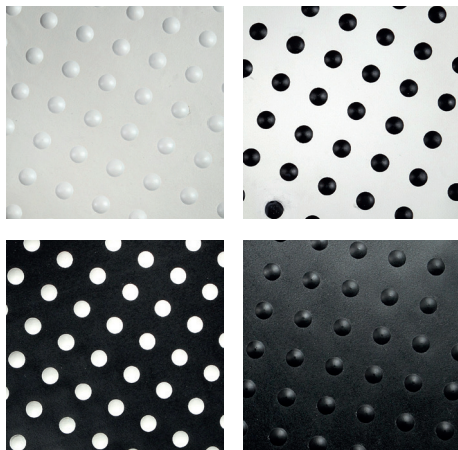

AXIMUM




MADE IN
FRANCE



TECHNICAL DESCRIPTION

- Fibreglass reinforced methacrylic resin strip with embossed areas compliant with the requirements of standard NFP 98-351
- Standard dimension: 60 x 42 cm
- On request : 90 x 42 cm, 42 x 42 cm
- Colors :
 - Plain white or black
 - Two-tone white sole/black blocks
 - Two-tone black sole/white blocks

Other colours on request

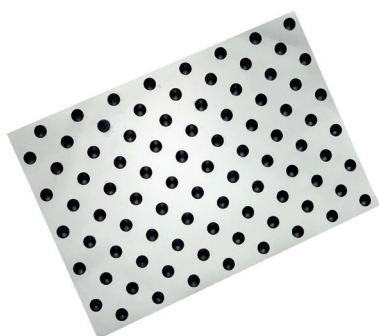

CONDITIONS FOR USE

> SURFACES

- Asphalt or surfaces should be free from sweating phenomenon
- Concretes over 28 days old free from laitance
- On concrete surfaces, it's advisable to first apply a layer of Indasprim primer (150 g/m²)
- Surface temperature limits: : 5°C<T<35°C
- Maximum humidity: 80 %
- Bituminous supports or concretes:
 - Cold bonding: Bonding with Mediacolle (1 to 3 kg/m² depending on the substrate's porosity)
 - Hot bonding: Bonding with a thermoplastic sole

> APPLICATION

- **Cold bonding:**
 - Apply Mediacolle adhesive to the clean, dry surface after delimiting the area with masking tape.
 - Position the Axiline strip on the glued surface
 - Service reinstatement time: 30 minutes
- **Hot bonding :**
 - Apply the thermoplastic sole, then heat it to fuse it with the substrate
 - Place the Axiline strip onto the sole, continuing to heat and lightly compacting it
 - Service reinstatement time: Immediate



SAFETY - ENVIRONMENT

- Product for professional use
- Store in a dry, ventilated place, away from frost, sunlight or any heat source
- Conservation: 12 months from date of manufacture if original packaging unopened
- Dirty packaging, cleaning and rinsing products are forms of waste to be processed according to current regulations
- See safety data sheet available at www.quickfds.fr