



Guider



Signal



Urban space



Roads



Motorways & Expressways

ROAD MARKING PRODUCTS WATER-BASED PAINT

VISTA



PERFORMANCES

REFLECTIVE ROAD MARKING

P7 - Q3 - R2 - S4

P: Traffic resistance
 Q: Daytime visibility
 R: Night-time visibility
 S: Anti-slip

ADVANTAGES

➤ USE

- **Very high whiteness**: average $Q_d > 160$ over the product's lifespan
- **Excellent durability**: 4 million wheel passes certification
- **Excellent night visibility**: average retroreflection level > 205
- **Very high skid resistance**

➤ OPERATION

- **Water-based product** protects users' health and safety
- **Sakapo® and Sakafu specific packaging** to facilitate waste management and reduce costs

SOCIAL AND ENVIRONMENTAL BENEFIT

• CIRCULAR ECONOMY

Use of recycled water in manufacture
 75% recyclable packaging

• WASTE REDUCTION

Sakapo® reduces the weight of non-recyclable waste by 65%

• AIR QUALITY

Low impact on air quality

• MADE IN FRANCE

Made in the Hauts-de-France region




MADE IN FRANCE



TECHNICAL CHARACTERISTICS

- Water-based acrylic paint
- Density: 1,78 kg/l
- Packaging :
 - 25kg net metal buckets fitted with Sakapo®
 - 300kg net total drums with removable head containing Sakafu

Other packaging: please contact us

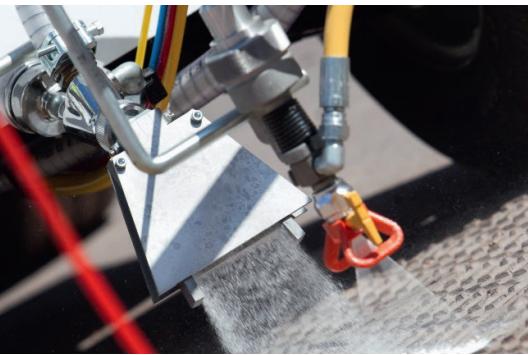

IMPLEMENTATION

- Pneumatic or airless machine fitted with a stainless steel tank (30 mesh filter)
- Avoid contact with oxidisable materials (iron, brass, copper, etc.)
- New or old hydrocarbon surfaces
- Apply to a clean, dry surface
- Surface temperature limits: $5^{\circ}\text{C} < T < 45^{\circ}\text{C}$
- Maximum humidity: 80 %

CONSUMPTION

	Reflective
Product rate	375 g/m ²
Powdering rate	390 g/m ²
Drying time*	< 10 min

* For an air temperature of 20°C



SAFETY - STORAGE

- Product for professional use, non-harmful, non-irritant, non-flammable
- Storage: in a dry, ventilated place, away from frost, sunlight and any source of heat
- Shelf life: 12 months from date of manufacture, in unopened original packaging
- Soiled packaging and cleaning and rinsing products are waste to be treated in accordance with current regulations
- See the Safety Data Sheet at www.quickfds.fr

