


AVANTAGE DIRECTIONNELLE

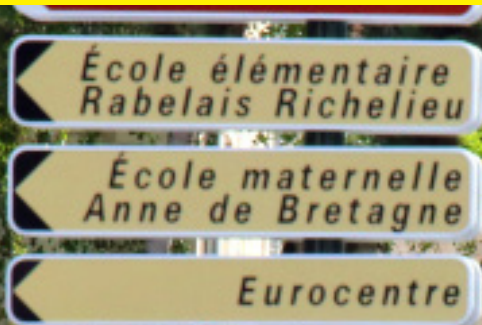

« A range of directional signs with a sleek design and open back. »

ADVANTAGES

► USAGE

- Impact-resistant directional signs for optimum user safety: crimped face and lateral band ensuring road signs durability
- Easy, safe installation and handling: rounded lines for a safe grip
- Durable fasteners: stainless steel screws, fastening rail, lateral band and aluminium collar
- Digital printing on a class 1, 2 or 3 retroreflective background

► OPTIONS

Several available:

- Colour customisation
- Anti-graffiti protective film
- Logo on back

THE SOCIAL AND ENVIRONMENTAL BENEFITS

- **SOCIAL PARTNERSHIP**
Components made by disabled adult workers in an ESAT disability integration workshop
- **RESOURCES ECONOMY**
Maximum reduction in residual waste
- **ENERGY SOBRIETY**
Laser cutting line running on compressed air without filler gas, LED wallpaper printer reducing energy consumption by 75%
- **MADE IN FRANCE**
Produced in the Centre- Val de Loire region

AVANTAGE DIRECTIONNELLE



TECHNICAL CHARACTERISTICS

Roadside directional signs :

- 1 or 2 TR/TC type mounts or mounts

Directional signage on poles:

- Single-sided or back-to-back sign (for double-sided signage)
- Adjustable panel
- Ø76, Ø114 and Ø160/114 aluminium fluted pole mounts

> PANEL TYPE D-E-EB

HEIGHT (mm)	CHARACTER HEIGHT	LENGTH (mm)								
		800	1000	1300	1600	1900	2200	2500	3000	3500
250	1 line 80 1 line 100	■	■	■	■	■	■			
300	1 line 125	■	■	■	■	■	■	■		
400	1 line 160 2 lines 100	■	■	■	■	■	■	■	■	■
500	1 line 200 2 lines 125	■	■	■	■	■	■	■	■	■
600	1 line 250 2 lines 160 3 lines 100		■	■	■	■	■	■	■	■
750	2 lines 200 3 lines 125		■ ■	■	■	■	■	■	■	■
900	2 lines 250 3 lines 160		■ ■	■ ■	■	■	■	■	■	■
1200	3 lines 200 3 lines 250		■ ■	■ ■	■ ■	■	■	■	■	■

■ Rectangle shape only ■ All ranges ■ ■ Roadside range only

> CARTRIDGES

LENGTH X HEIGHT (mm)					
350 x 150	500 x 150	500 x 200	500 x 250	700 x 250	800 x 300

- Can be fixed to the directional sign (shoulder version only)

- Class 1, 2 or 3 cartridges with retroreflective

> AVANTAGE-RANGE ROADSIDE SUPPORTS

SUPPORTS	TR/TC					IA PER ML	IB	IC	ID	IE
Section	80x40x1.5	80x40x3	80x80x2	80x80x3	100x100x3.2	95x57	117x70	144x86	178x106	219x131
Maximum permissible moment daN.m	120	207	380	516	910	576	1079	2021	3795	7118

> AVANTAGE-RANGE SUPPORTS

FLUTED POLES	Ø76	Ø114				Ø160/114	
Moment class	MB	MC	MD	ME	MF	MG	MH
Maximum permissible moment daN.m	340	500	1000	1500	2500	3500	5000



AXIMUM INDUSTRIE
7, rue Frédéric Chopin - 37310 Chambourg-sur-Indre, France
Phone: +33 (0)2 47 91 14 90
aximum.fr